


# 14 3/8 Inch Power Tong with 15 1/2 Inch Zero Side Load Back-up

## Key Benefits and Features

- Hydraulic Shift
- Optimized camming system
- Adjustable height zero side load integral back-up

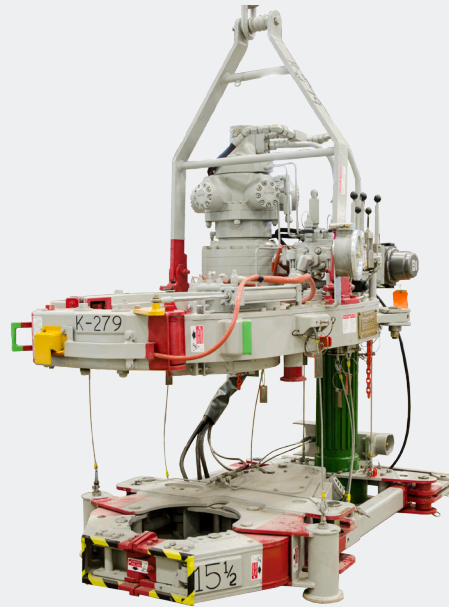

Use in the following applications: **Deepwater and ultra-deepwater** **Mid-water shelf** **Land**

Frank's designs and manufactures power tongs to meet the strict criteria of our customers. Frank's inventories over 3,000 hydraulic power tongs in different models, sizes, and torque capacities, ranging from tubing sizes up through 38 inch casing size. All Frank's tongs are equipped to work in conjunction with the DATA-TREK, as well as tong door Interlock system for safety, and may be equipped with integral backups.

## Specifications

Size Range	5 1/2 inches - 14 3/8 inches
High Gear RPM/Torque	34.6 / 11,000 foot-pounds [14,900 Nm]
Low Gear RPM/Torque	8.2 / 70,000 foot-pounds [94,900 Nm]
Weight	5,000 pounds [2,270 kilograms]