


Manufactured Bowls and Slips

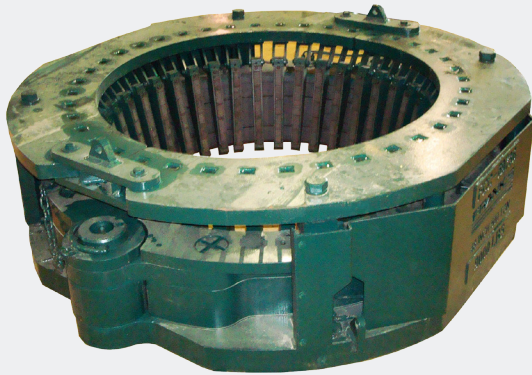


Key Benefits and Features

- Manufactured out of wrought materials, with no casting
- Available in a range of sizes from 4 1/2 inches - 48 inches and tonnages ranging from 350 - 500 tons
- Available as manual or pneumatically powered

Use in the following applications: Deepwater and ultra-deepwater Shelf Land

Specifications

Size	Rating	Slip Lift	Power
4 1/2 inches	350 tons		
5 1/2 inches	350 tons		
6 inches	350 tons		
7 5/8 inches	350 tons	•	
8 5/8 inches	350 tons	•	
9 5/8 inches	350 tons	•	
10 3/4 inches	350 tons	•	
11 3/4 inches	350 tons	•	
11 7/8 inches	350 tons	•	
13 3/8 inches	350 tons	•	
13 5/8 inches	350 tons	•	
14 inches	350 tons	•	
16 inches	500 tons	•	
18 inches	500 tons	•	
18 5/8 inches	500 tons	•	
20 inches	500 tons	•	
22 inches	500 tons	•	
24 inches	500 tons	•	
26 inches	500 tons	•	•
28 inches	500 tons	•	•
30 inches	500 tons	•	•
36 inches	500 tons	•	•
38 inches	500 tons	•	•
42 inches	500 tons	•	•
46 inches	500 tons	•	•
48 inches	500 tons	•	•

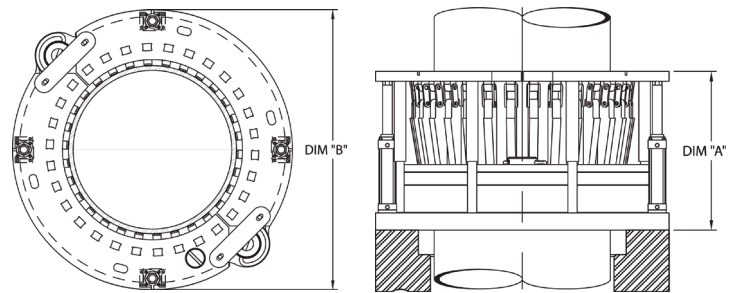

Size	Pipe Range	Dim. A	Dim. B
14 inches	4 1/2 inches - 14 inches	14 7/8 inches	46 inches
16 inches	14 inches - 16 inches	14 7/8 inches	52 inches
20 inches	16 inches - 20 inches	14 7/8 inches	52 inches
24 inches	22 inches - 28 inches	14 7/8 inches	60 inches
26 inches	22 inches - 26 inches	14 7/8 inches	60 inches
30 inches	24 inches - 30 inches	14 7/8 inches	61 inches
36 inches	30 inches - 36 inches	14 7/8 inches	76 inches
42 inches	38 inches - 42 inches	14 7/8 inches	79 inches
46 inches	46 inches	14 7/8 inches	79 inches