


## XT-22 with Backup

### Key Benefits and Features

- Local control or remote control
- Hydraulic shift
- Torque measurement with hydraulic load cell and/or DATA-TREK® Advantage Torque Turn Monitoring System
- Zero side load reaction system eliminates side load and bending during connection makeup
- Can be used with Frank's Tong Pusher Arm (TPA) with optional Remote Tong System (RTS)

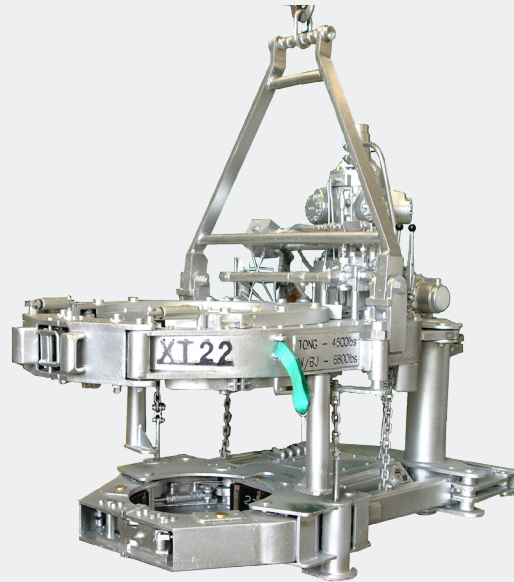

Use in the following applications: Deepwater and ultra-deepwater Mid-water shelf Land

Frank's designs and manufactures power tongs to meet the strict criteria of our customers. Frank's inventories over 3,000 hydraulic power tongs in different models, sizes, and torque capacities, ranging from tubing sizes up through 38 inch casing size. All Frank's tongs are equipped to work in conjunction with the DATA-TREK, as well as tong door Interlock system for safety, and may be equipped with integral backups.

### Specifications

Size Range	11 7/8 inches - 22 inches
High Gear RPM/Torque	19.2 / 7,000 ft-lbs [9,500 Nm]
Low Gear RPM/Torque	2.1 / 112,000 ft-lbs [152,000 Nm]
Weight	6,800 pounds [3,085 kilograms]